


ITEM # 1

Single Package Vertical Unit

2 Ton Heat Pump w/ 5 KW Aux. Heat
& R-410-A Refrigerant

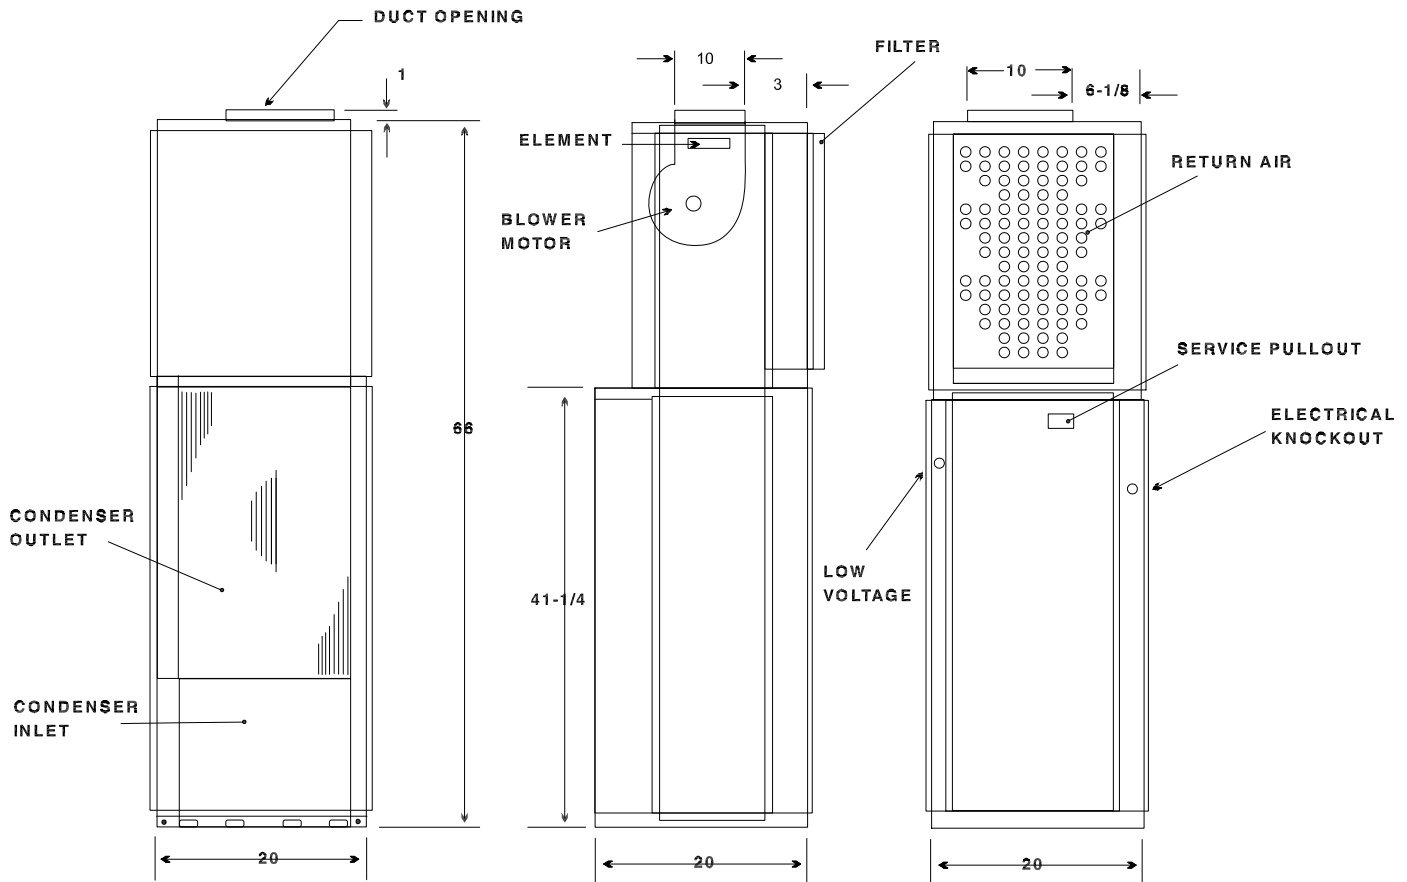

ELE CTRICAL DATA (208/230V-1PH-60Hz)																	
UNIT MODEL	ELECTRIC HEAT DATA						BLOWER DATA		CONDENSER DATA				MINIMUM CIRCUIT AMPACITY		MAXIMUM CIRCUIT PROTECTION		SHIP WT.
	kW		BTUH		TOTAL HEATING AMPS		E VAPORATOR MOTOR		COMPRESSOR		CONDENSER MOTOR						
	230V	208V	230V	208V	230V	208V	AMPS	HP	RLA	LRA	FL A	HP	208V	230V	208V	230V	
24SPXR-5-HP- A	4.5	3.38	15350	11500	21.6	19.1	2.8	1/3	99	54	74	1/8	24	27	25	30	255

BLOWER DATA									
UNIT MODEL	MOTOR SPEED CONN. (1)	CFM vs EXTERNAL STATIC PRESSURE							
		0.05	0.10	0.15	0.20	0.25	0.30	0.35	0.40
24SPXR-HP-A	HIGH	920	900	880	860	835	810	785	760
	MED (C)	870	860	850	840	820	800	775	750
	LOW(H)	760	750	740	730	720	710	700	690

(1) Factory Settings:
(H) = Heating, (C) = Cooling

COOLING / PERFORMANCE DATA		
UNIT MODEL	STANDARD RATING (1)	EER
	BTUH	
24SPXR-HP-A	21300	9.0

HEATING / PERFORMANCE DATA (3)		
UNIT MODEL	STANDARD RATING (1)	COP (47°)
	BTUH	
24SPXR-HP-A	20300	3.0

(1) 95°F DB/75°F WB outdoor - 80°F DB/67°F WB indoor.
(2) Tested in accordance with ARI Standard 390.

(1) 47°F DB/43°F WB outdoor,
70°F DB/60°F WB indoor.