

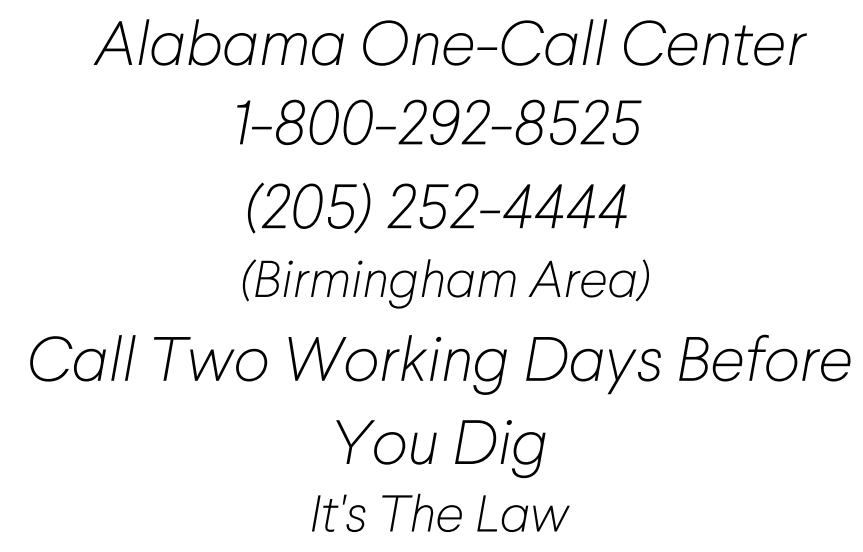
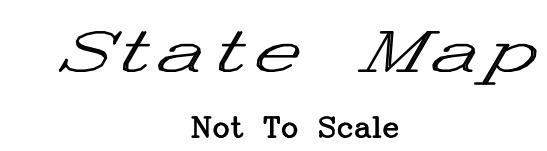


<u>SHEET NO.</u>	<u>DESCRIPTION</u>
Sheet C0.0	TITLE SHEET
Sheet C0.2	EXISTING CONDITIONS PLAN
Sheet C1.0	SITE DEMOLITION PLAN
Sheet C2.0	EROSION, AND SEDIMENT CONTROL PLAN
Sheet C3.0	DETAILS



- *Owner*
UNIVERSITY OF NORTH ALABAMA
DEPARTMENT OF FACILITIES
ADMINISTRATION AND PLANNING
ATTN: BOB BERRY
UNA BOX 5018
EAST CAMPUS
FLORENCE, AL 36532-0001
256.765.4274
- *Engineer*
GOODWYN MILLS CAWOOD, LLC.
COREY SHOOP, P.E.
2400 FIFTH AVENUE, SOUTH
SUITE 200
BIRMINGHAM, AL 35233
205.879.4462



2400 5th Avenue S, Suite 200
Birmingham, AL 35233
T 205.879.4462
GMCNETWORK.COM

	ISSUE	DATE
ISSUE FOR BID		11/04/2021
	DRAWN BY:	
	CHECKED BY:	

UNA MATH AND CSIS BUILDING
DEMOLITION PACKAGE
FLORENCE, ALABAMA


GMC Project #CBHM210032



11-4-2021

WILEY

C0.0
sheet 1 of 5

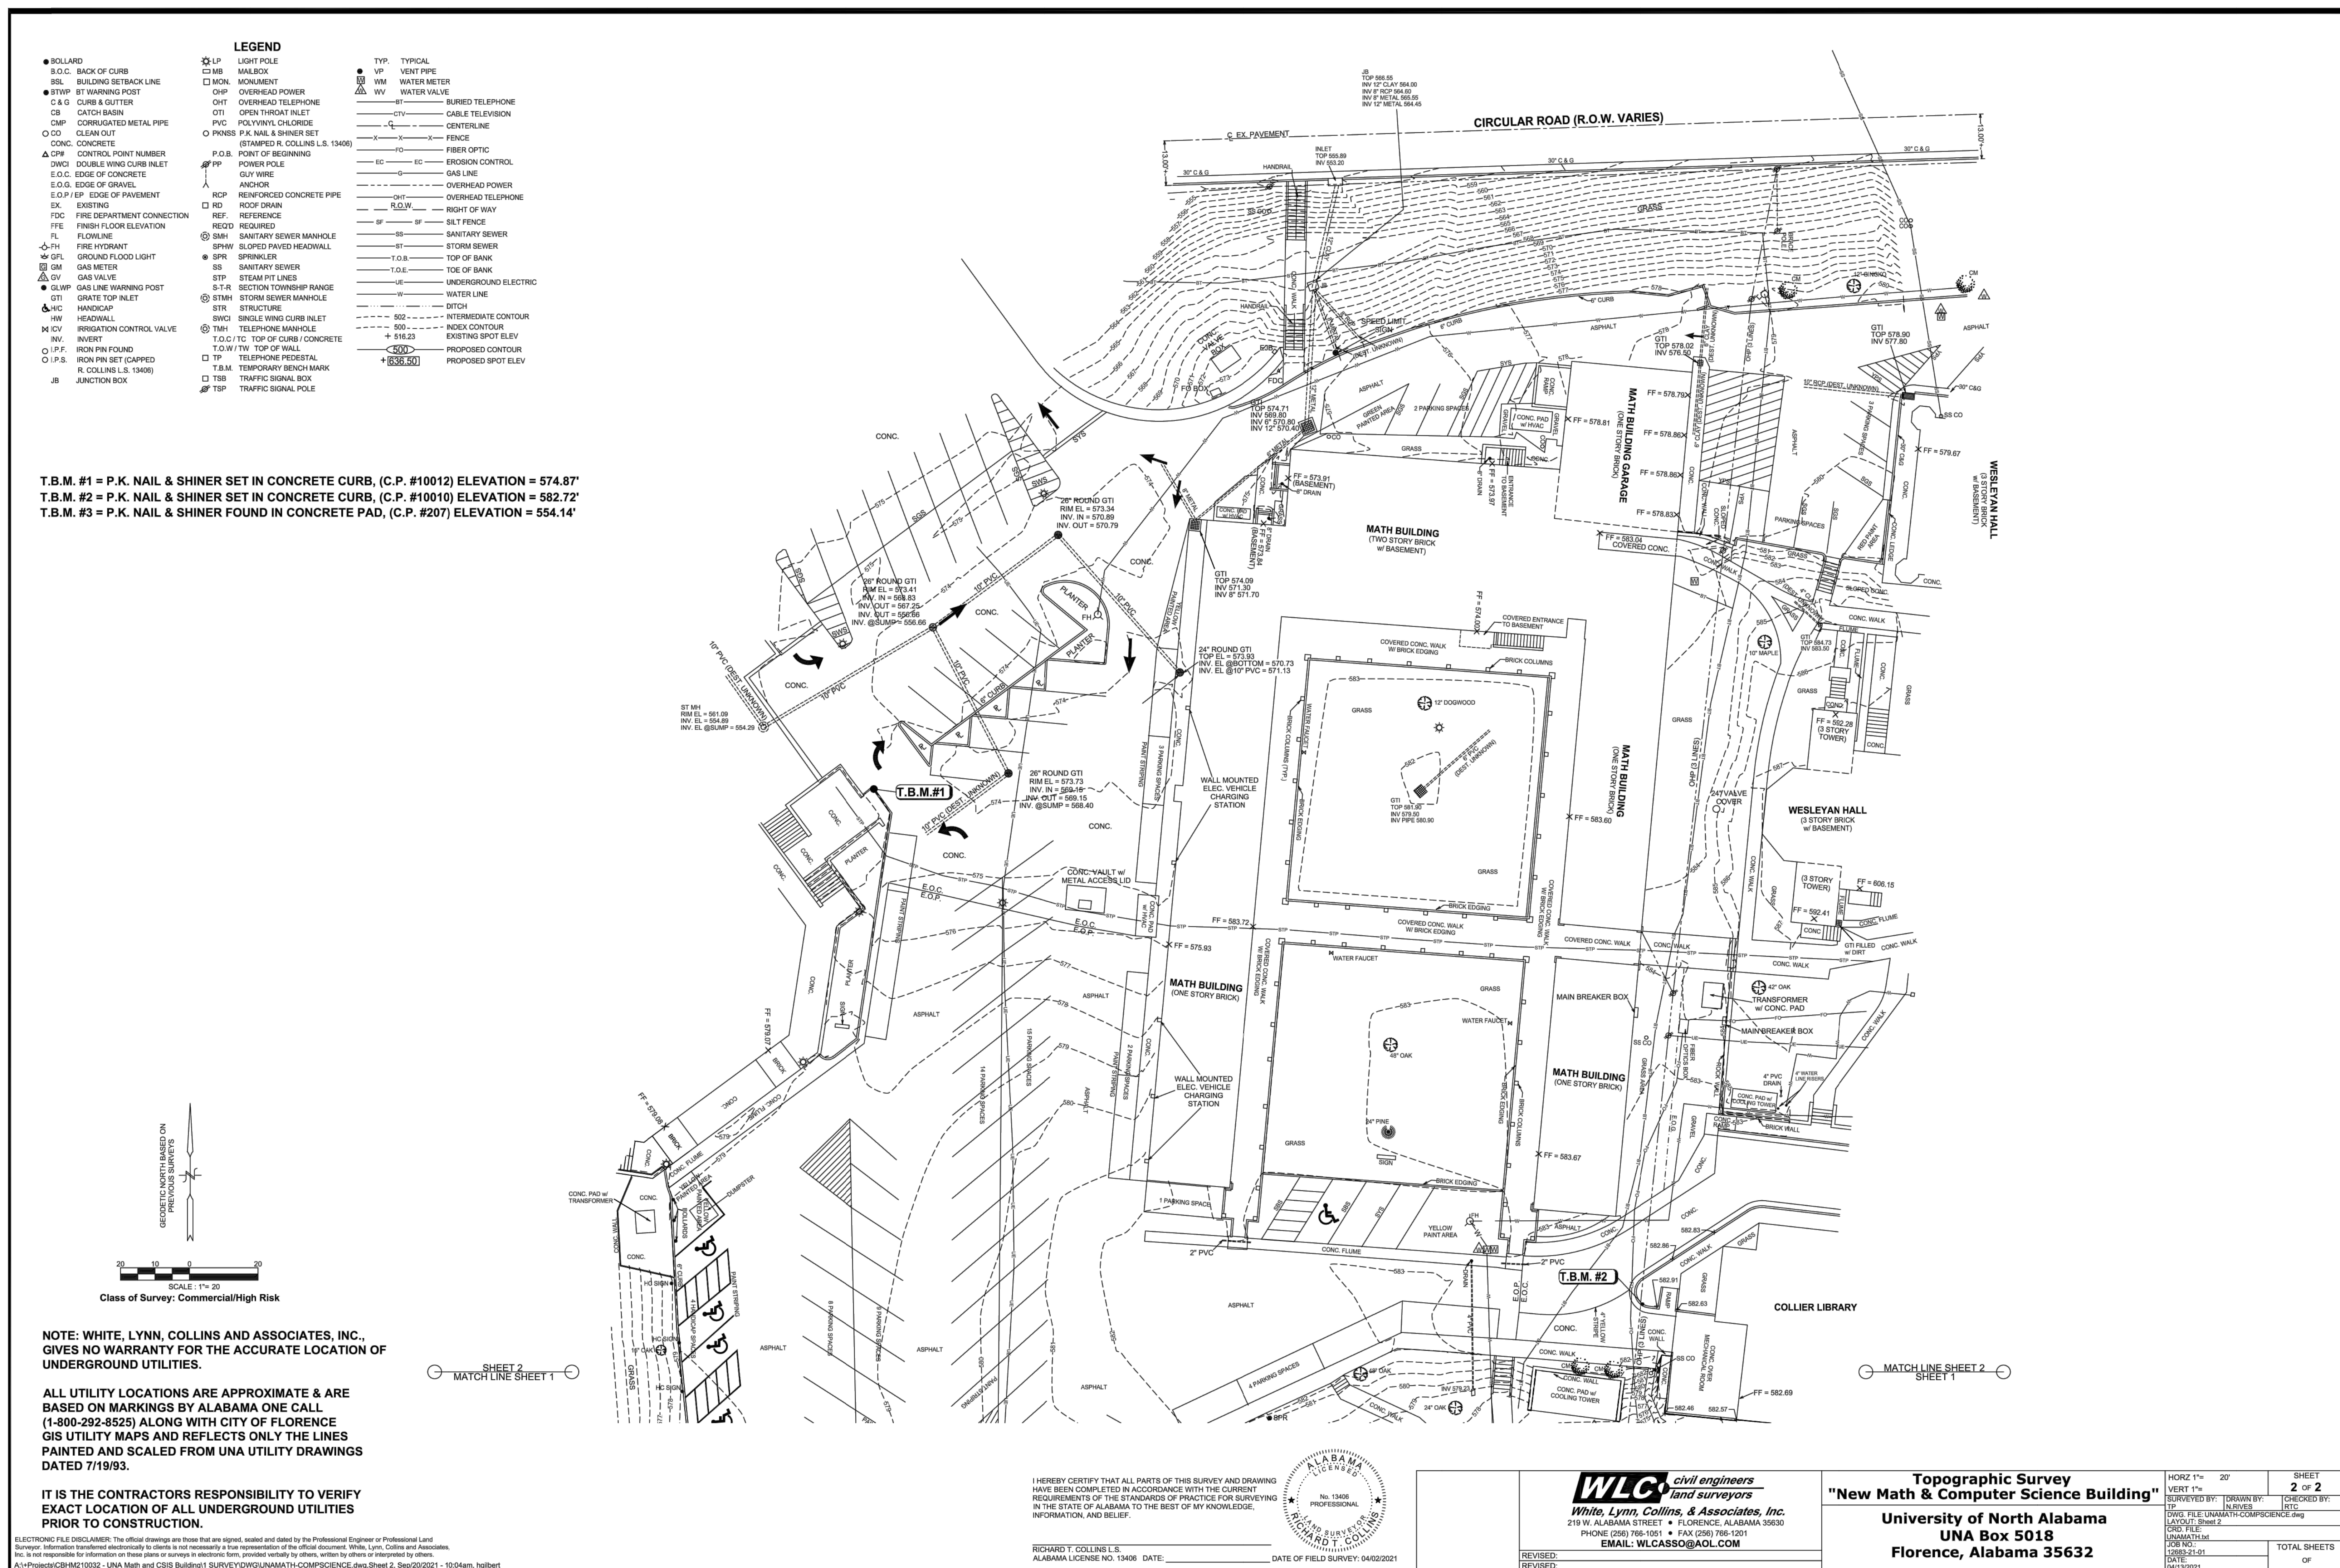

DEMOLITION NOTES


1. THE CONTRACTOR SHALL BE RESPONSIBLE FOR FIELD VERIFICATION OF THE LOCATION OF ALL UTILITIES IN ALL AREAS TO BE REMOVED OR DEMOLISHED. PRIOR TO COMMENCEMENT OF WORK, THE UTILITIES TO BE LOCATED SHALL INCLUDE, BUT NOT BE LIMITED TO WATER, GAS, SANITARY SEWER, STORM SEWER, SITE LIGHTING, IRRIGATION, SECURITY, CABLE, SITE ELECTRICAL, FIBER OPTIC, AND TELEPHONE.
2. ALL UTILITIES TO BE REMOVED SHALL BE CUT, REMOVED, CAPPED, ETC. ACCORDING TO ALL GOVERNING AGENCIES SPECIFICATIONS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR CONTACTING ALL UTILITY AGENCIES PRIOR TO ANY WORK BEING PERFORMED ON THEIR RESPECTIVE LINES. THE CONTRACTOR SHALL BE RESPONSIBLE FOR NOTIFYING AND INFORMING EACH UTILITY AGENCY OF THE SCOPE OF WORK AND SCHEDULE OF COMPLETION, AND SHALL COORDINATE ALL INSPECTIONS.
3. THE CONTRACTOR SHALL VERIFY ALL UTILITY LOCATIONS IN THE FIELD AND SHALL LOCATE ON THE GROUND WITH PAINT OR OTHER EASILY VISIBLE MEANS ALL UNDERGROUND UTILITIES PRIOR TO ANY CONSTRUCTION EFFORTS. THE UTILITIES TO BE LOCATED SHALL INCLUDE, BUT NOT BE LIMITED TO WATER, GAS, SANITARY SEWER, STORM SEWER, SITE LIGHTING, IRRIGATION, SECURITY, CABLE, SITE ELECTRICAL, AND TELEPHONE. CONFLICTS OR DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE PROJECT ENGINEER IMMEDIATELY. THE UTILITIES SHOWN ARE ILLUSTRATED AS LOCATED ON THE GROUND BY LINE LOCATORS, SURVEY OF ABOVE GROUND STRUCTURES, AND/OR ACCORDING TO UTILITY MAPS OR UTILITY ADMINISTRATOR'S RECOLLECTION, AND ARE PROVIDED AS INFORMATION ONLY.
4. THE CONTRACTOR SHALL PRESERVE AND PROTECT, ACCORDING TO THE INSTRUCTIONS OF THE UTILITY INVOLVED, ANY "LIVE" UTILITIES LOCATED BY THE UTILITY COMPANY OR THE CONTRACTOR.
5. DEMOLITION ITEMS SHOWN ARE CONSIDERED TO BE A MINIMUM. UNDERGROUND STORAGE TANKS AND UNMARKED UTILITIES SHOULD ALSO BE REMOVED AND BACKFILLED WITH PROPERLY COMPACTED MATERIAL. THESE UTILITIES MAY INCLUDE, BUT NOT LIMITED TO SANITARY SEWER LATERALS, TELEPHONE LINES, CABLE LINES, GAS LINES, WATER LINES, ETC.
6. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE REMOVAL OF ALL UTILITIES ASSOCIATED WITH THE DEMO OF EXISTING BUILDINGS. THESE UTILITIES MAY INCLUDE, BUT NOT LIMITED TO A/C, A/C PADS, SIDEWALKS, DUMPSTER PADS, BOLLARDS, POWER POLES, SANITARY SEWER LATERALS, TELEPHONE LINES, CABLE LINES, ETC.
7. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REMOVAL AND RELOCATION OF ALL UTILITY LINES LOCATED UNDERNEATH THE PROPOSED BUILDINGS.
8. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE REPLACEMENT OF ALL CONCRETE, SIDEWALKS, WALLS, ETC. DAMAGED DURING CONSTRUCTION. ALL DISTURBED AREAS SHALL BE RESTORED TO THE ORIGINAL CONDITION OR AS ACCEPTED BY THE OWNER.

DEMO LEGEND

- ASPHALT PAVEMENT TO BE REMOVED
- CONCRETE SIDEWALK TO BE REMOVED
- CONCRETE PAVEMENT TO BE REMOVED
- GRAVEL TO BE REMOVED
- STORM INLETS AND ASSOCIATED PIPES TO BE REMOVED
- STORM PIPES TO BE REMOVED
- CONSTRUCTION FENCE
- FUTURE BUILDING CONTROL AREA

NOTE: CONTRACTOR IS TO BACKFILL TRENCHES OF REMOVED UTILITIES WITH FLOWABLE FILL CONCRETE INSIDE THE FUTURE BUILDING CONTROL AREA

ALL ELECTRICAL WORK SHALL BE PERFORMED BY A LICENSED ELECTRICIAN IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND ANY APPLICABLE LOCAL CODES AND ORDINANCES.

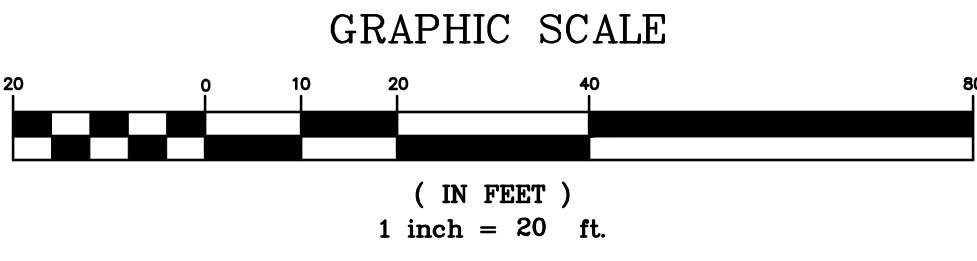

GMC

2400 5th Avenue S, Suite 200
Birmingham, AL 35233
T 205.879.4462
GMCNETWORK.COM

ISSUE	DATE
ISSUE FOR BID	11/04/2021

UNA MATH AND CSIS BUILDING
DEMOLITION PACKAGE
FLORENCE, ALABAMA

GMC Project #CBHM210032

SITE DEMOLITION PLAN

C1.0
Sheet 3 of 8

11-4-2021

PROFESSIONAL
REGISTERED
ENGINEER
STATE OF ALABAMA
NO. 58715
DAVID L. BARNES

